

ChemLINE® 2400/32 EA

*A protective lining for abrasion resistant service
at higher temperatures, containing no VOCs.*



Description

ChemLine® 2400/32 EA is an abrasion resistant two component ambient or low temperature force cured polymer lining system. ChemLine® 2400/32 EA is a tough, flexible lining designed to handle the abrasiveness of coal, ore, plastic pellets, slurries and other media.

ChemLine® 2400/32 EA has excellent chemical resistance capable of withstanding the corrosive attack that normally comes with media handled.


Chemical Resistance

Sulfuric acid to 98%, most solvents including methylene chloride, MEK, methanol, gasohol, distilled water, inorganic acids, dilute organic acids and alkalis. Ideal for corrosive vapor environments.

Industry Applications

- ▶ Hopper cars
- ▶ Coal chutes
- ▶ Slurry pipe
- ▶ Bag houses
- ▶ Legs of oil platforms
- ▶ Ion exchange vessels
- ▶ Pumps

Abrasion Resistance

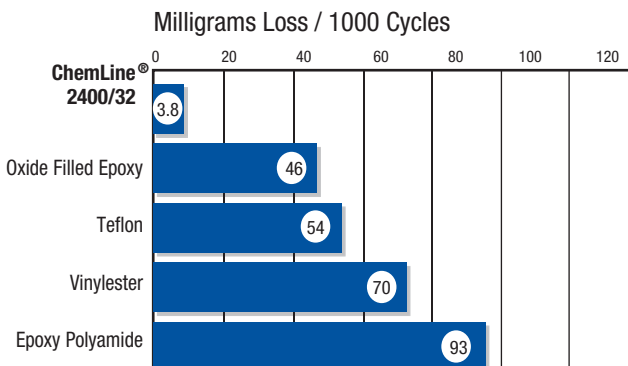

Application Highlights

- ▶ Can be applied to pitted and corroded steel surfaces
- ▶ Very high abrasion resistance
- ▶ Low temperature cure
- ▶ No VOC
- ▶ Excellent adhesion
- ▶ Good flexibility and toughness
- ▶ Field repairable
- ▶ Steam cleanable
- ▶ Complies with all FDA regulations
- ▶ Resists hydroblasting
- ▶ Dry heat resistance up to 400°F (204°C)
- ▶ ChemLine® 2400/32 EA coating complies with the FDA and all applicable food additive regulations

Typical Properties

- ▶ Stock Colors _____ Red/Gray
- ▶ V.O.C. Level/Gal. _____ 0 grams/L (0 lbs./gal.)
- ▶ Lead Content _____ Zero
- ▶ Chromate Content _____ Zero
- ▶ Pot Life _____ 30 minutes @ 75°F (24°C)
- ▶ Viscosity Reduction _____ Reduce with Toluene or Xylene
- ▶ Solids by Volume _____ 100%
- ▶ Recommended Film Thickness (dry) mils average ____ Trowel up to 125 mils (up to 45 mils per lift) on 10 mil base of ChemLine® 2400/32
- ▶ Shelf Life _____ 12 months

For product recommendations and technical, application and heat curing information contact Advanced Polymer Coatings' customer service. Contact +01 440-937-6218.

Chart Background

Comparison of ChemLine® 2400/32 vs. Various Linings using Taber Abrasion Test ASTM D4060 C-17 WHEEL

Superior Corrosion Resistance Performance

This is Only A Reference Guide. This is an abbreviated listing of the more than 5,000 chemicals that have been tested. This information is intended to serve as a reference guide only. The end user is responsible for determining if ChemLine® is the appropriate coating for the specific application involved. Contact your ChemLine® Representative or the ChemLine® Customer Service Hotline +01 440-937-6218 for detailed specifications prior to any final coatings recommendation or application.

Chemical Resistance Test

See the APC Chemical Resistance Tables for more complete chemical listings.

	ChemLine®	Vinyl Ester	Epoxy (Hibuild)	Rubber	Phenolic (Hibake)
Acetone	A	N	N	N	A
Ammonium Chloride	A	A	A	A	L
Ammonium Hydroxide	A	A	A	A	L
Benzene	A	A	N	N	A
Black Liquor (Paper)	A	A	A	A	L
Bromine Water	A	N	N	N	L
Carbon Tetrachloride	A	A	N	N	A
Chlorine Water	A	A	N	A	N
Chlorobenzene	A	A	A	N	N
Chromic Acid, 20%	A	N	N	A	L
Dichlorobenzene	A	N	N	—	N
Dimethylformamide	A	N	N	N	A
Ethanol	A	A	A	L	A
Formaldehyde	A	A	A	N	A
Furfural Alcohol	A	L	N	N	A
Gasoline	A	A	A	N	A
Hydraulic Oil	A	A	L	L	A
Hydrochloric Acid, 0-37%	A	A	A	A	L
Hydrofluoric Acid, 40%	A	N	N	—	N

	ChemLine®	Vinyl Ester	Epoxy (Hibuild)	Rubber	Phenolic (Hibake)
Hydrofluorosilic Acid	A	L	L	L	L
Jet Fuel	A	A	A	L	A
Kerosene	A	A	A	L	A
Latex	A	L	L	N	A
Methanol	A	L	N	N	A
Methylene Chloride	A	N	N	N	A
MEK	A	L	N	N	A
MIBK	A	L	N	N	A
Nickel Plating	A	A	A	---	A
Slurries	A	L	L	L	L
Sodium Chloride	A	A	A	A	A
Sodium Dichromate	A	L	N	A	N
Sodium Hydroxide	A	N	L	A	N
Sulfite Liquor (Paper)	A	A	A	A	A
Sulfuric Acid, 0-98%	A	N	N	A	A
Tallow	A	N	N	N	A
Toluene	A	A	A	N	A
Trichloroethylene	A	N	N	N	---
White Liquor (Paper)	A	A	A	L	A

A = Good at ambient temperatures

L = Limited Service

N = Not recommended

— = No information

The furnishing of the information contained herein does not constitute a representation by Advanced Polymer Coatings (APC) that any product or process is free from patent infringement claims of any third party, nor does it constitute the grant of a license under any patent of APC or any third party. APC assumes no liability for any infringement which may arise out of the use of the product. APC warrants that its products meet the specifications which it set for them. APC DISCLAIMS ALL OTHER WARRANTIES and relating to the products and DISCLAIMS ALL WARRANTIES RELATING TO THEIR APPLICATION expressed or implied INCLUDING but not limited to warranties of MERCHANTABILITY AND FITNESS for particular purpose. Receipt of products from APC constitutes acceptance of

the terms of the Warranty; contrary provisions of purchase orders notwithstanding. In the event that APC finds that products delivered are off-specification, APC will at its sole discretion, either replace the products or refund the purchase price thereof. APC's choice of one of these remedies shall be Buyer's sole remedy. APC will under no circumstances be liable upon for consequential damages except in so far as liability is mandated by law. APC will deliver products at agreed upon times in so far as it is reasonably able to do so, but APC shall not be liable for failure to deliver on time when the failure is beyond its reasonable control.

© 2012 0802



Advanced Polymer Coatings
 Avon, Ohio 44011 U.S.A.
 +01 440-937-6218 Phone
 +01 440-937-5046 Fax
 800-334-7193 Toll-Free in USA & Canada

Advanced Polymer Coatings is an...



ABS Certified Manufacturing Company
 ISO 9001: 2008
 Certificate No. 43217

www.adv-polymer.com